



```
a ← 1:5  
f ← function(a, b = 2*a) {  
  a + b  
}
```

Global variables



```
f(2*a, b = 2*a) # both args provided
```

Local variables

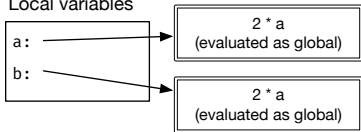

```
f(2*a) # use default b
```

Local variables

